


# Type KX SPDT manual reset high limit, adjustable, commercial type

## DIMENSIONS

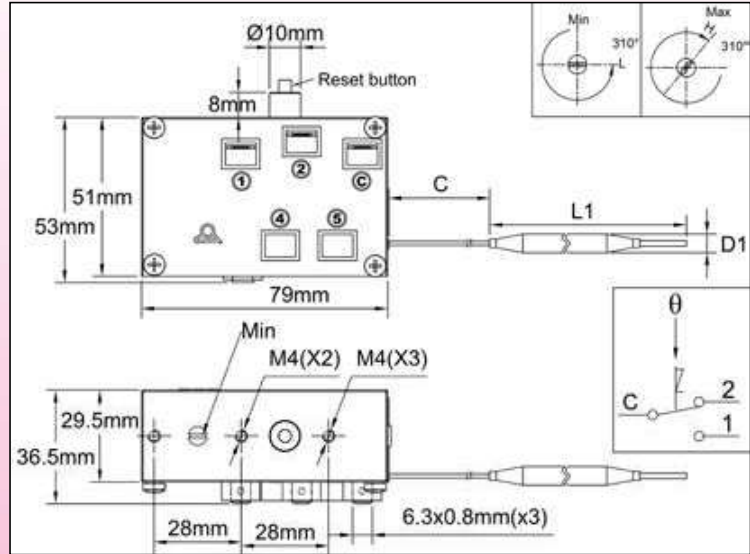

## TECHNICAL FEATURES

- Housing dimensions:** 79 x 53 x 36 mm (without terminals)
- Bulb and capillary:** Copper for temperature ranges up to 50°C(120°F), stainless steel above ,capillary length 1500 mm or 3000 mm. Capillary minimum bending radius 5mm.
- Temperature sensing element:** Liquid filled bulb and capillary.
- Terminals:** 6.35 x 0.8 quick connect terminals (M4 screws also available on request),
- Adjustment:** Dia. 6 mm shaft with 4.6 mm flat, (other lengths or fixed setting available on request).
- Mounting:** Front bracket with 2 xM4 threads, 28 mm distance
- Rating:** 15A (1/4 HP) 250VAC, 15A 400V res.
- Contacts:** SPDT (snap action contact)
- Electrical life:** >100.000 cycles at nominal rating

## Main references

Reference	Temperature range (°C/°F)	Capillary length (mm)	Bulb diameter (mm)	Bulb length (mm)	Reset Differential (°C/°F)	Max temperature on bulb (°C/°F)
KXC-250252200	-25+25°C (-15+80°F)	1500	6.4	152	6±2°C/42.8±35.6°F	50°C (120°F)
KXC-1001552000	-10+15°C (15-60°F)	1500	6.4	152	6±2°C/42.8±35.6°F	50°C (120°F)
KXC0000502000	0-50°C (32-120°F)	1500	6.4	152	6±2°C/42.8±35.6°F	60°C (140°F)
KXC0000705200	0-70°C (32-160°F)	1500	4.8	120	10±3°C/50±37.4°F	160°C (320°F)
KXC0000701200	0-70°C (32-160°F)	3000	4.8	120	10±3°C/50±37.4°F	160°C (320°F)
KXC0200905000	20-90°C (70-195°F)	1500	4.8	120	10±3°C/50±37.4°F	160°C (320°F)
KXC0200901000	20-90°C (70-195°F)	3000	4.8	120	10±3°C/50±37.4°F	160°C (320°F)
KXC0101505000	10-150°C (50-300°F)	1500	4.8	120	10±3°C/50±37.4°F	160°C (320°F)
KXC0101501000	10-150°C (50-300°F)	3000	4.8	120	10±3°C/50±37.4°F	160°C (320°F)
KXC0802000100	80-200°C (175-390°F)	1500	4	100	20±4°C/68±39.2°F	320°C (610°F)
KXC0503000100	50-300°C (120-570°F)	1500	4	100	20±4°C/68±39.2°F	320°C (610°F)
KXC0104507000	10-450°C (50-840°F)	1500	4.8	120	40±6°C/104±42.8°F	760°C (1400°F)
KXC0104509000	10-450°C (50-840°F)	3000	4.8	120	40±6°C/104±42.8°F	760°C (1400°F)
KXC0605007000	60-500°C (140-930°F)	1500	4.8	120	40±6°C/104±42.8°F	760°C (1400°F)
KXC0605009000	60-500°C (140-930°F)	3000	4.8	120	40±6°C/104±42.8°F	760°C (1400°F)
KXC1806007000	180-600°C (360-1110°F)	1500	4.8	120	40±6°C/104±42.8°F	760°C (1400°F)
KXC1806009000	180-600°C (360-1110°F)	3000	4.8	120	40±6°C/104±42.8°F	760°C (1400°F)
KXC2807008000	280-700°C (540-1290°F)	1500	3	300	40±6°C/104±42.8°F	760°C (1400°F)

**Caution:** Bulbs and capillaries of ranges higher than 300°C are filled with sodium potassium eutectic. If they leak or are broken this liquid is flammable if in contact with water

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Unless exceptionally specified by this logo, products and components in this catalogue are members of the JPC Ultimate alliance members.