


Slow action contact miniature pressure switches , 6.3 x 0.8 mm QC terminals, plastic fitting SPNO contact : Type ZA

DIMENSIONS

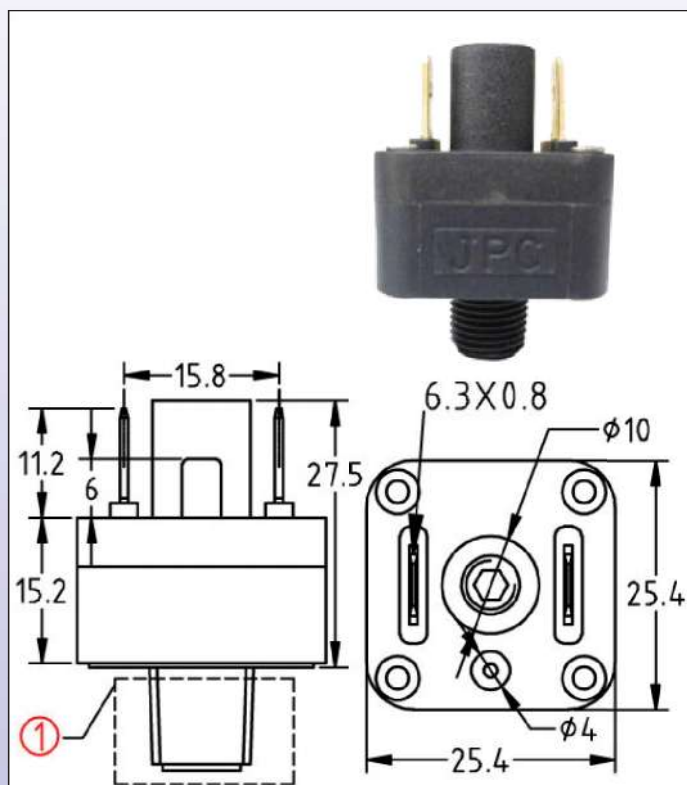

Uses: Low voltage, high sensitivity

Main applications: Electronic circuits. Pressure sensing on water heaters. This pressure switch is more sensible than snap action models and can be calibrated at lower pressure values. Very small differential.

Membranes: EPDM, dia 22 mm. Silicone or NBR on request

Fluid: water or air

Fitting: Plastic

Pressure: positive

Housing: PA66, UL94 V0

Contact: single pole normally open, slow make.

Electrical rating:

- Silver contact: max 1A 250V

- Gold plated contact: max 100 mA, 24V

Action: momentary, close on pressure rise.

Set point calibration: factory calibrated and sealed, not field adjustable


Set point calibration limits: standard calibration 150mbar, other values are achievable from 100 to 1300 mbar

Electrical connection: 6.35 x 0.8 mm quick connect terminals

Maximum pressure: 2 bars (29 PSI)

Ambient temperature limits: 0 to 85°C

Available pressure inlet fittings ①

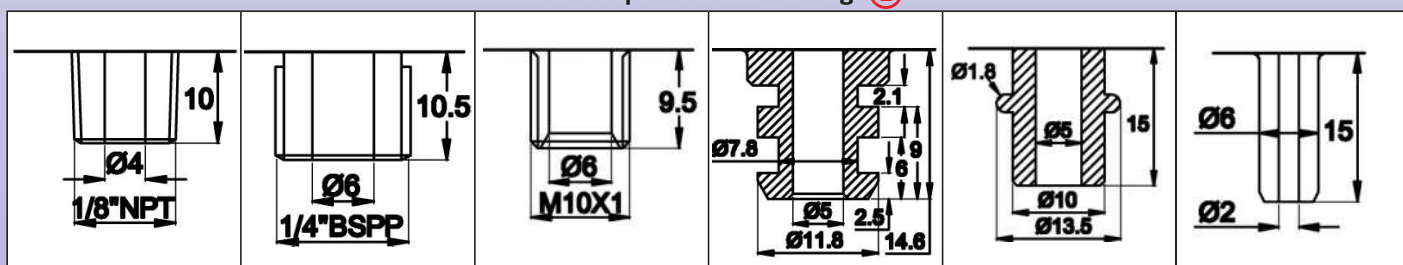


References (with calibration at 150 mbar):

Pressure inlet	Silver contact	Gold plated contact
1/8" NPT	ZA2X28EA0A500000	ZA2X28EG0A500000
1/4" BSPP	ZA2X2QEA0A500000	ZA2X2QEG0A500000
M10 x 1	ZA2X2MEA0A500000	ZA2X2MEG0A500000
Snap in fitting, 2 grooves dia 7.8	ZA2X2TEA0A500000	ZA2X2TEG0A500000
Snap in fitting, 1 groove dia 10	ZA2X2ZEA0A500000	ZA2X2ZEG0A500000
Snap in fitting, 1 spout dia 6 mm	ZA2X2AEA0A500000	ZA2X2AEG0A500000

Other set point values: replace A50 in the product reference by the requested value in mbar

Slow action contact miniature pressure switches, 6.3 x 0.8 mm QC terminals, plastic fitting SPNC contact : Type ZA

DIMENSIONS

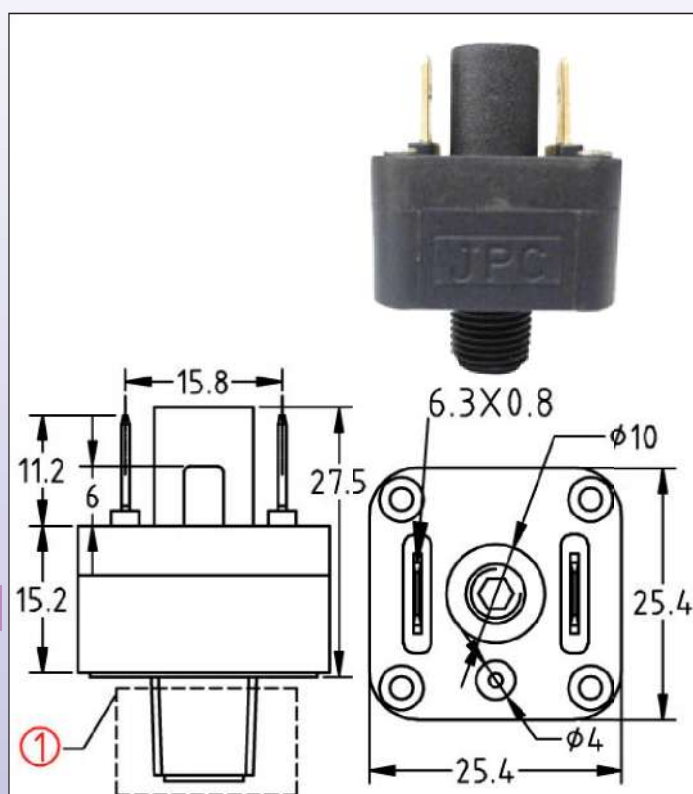

Uses: Low voltage, high sensitivity

Main applications: Electronic circuits. Pressure sensing on water heaters. This pressure switch is more sensible than snap action models and can be calibrated at lower pressure values. Very small differential.

Membranes: EPDM, dia 22 mm. Silicone or NBR on request

Fluid: water or air

Fitting: Plastic

Pressure: positive

Housing: PA66, UL94 VO

Contact: single pole normally close, slow break.

Electrical rating:

- Silver contact: max 1A 250V

- Gold plated contact: max 100 mA, 24V

Action: momentary, open on pressure rise.

Set point calibration: factory calibrated and sealed, not field adjustable


Set point calibration limits: standard calibration 150mbar, other values are achievable from 100 to 1300 mbar

Electrical connection: 6.35 x 0.8 mm quick connect terminals

Maximum pressure: 2 bars (29 PSI)

Ambient temperature limits: 0 to 85°C

Available pressure inlet fittings ①

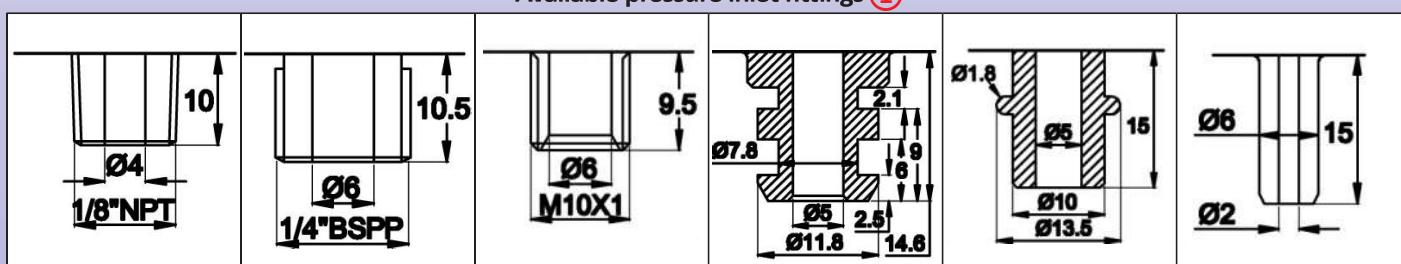


References (with calibration at 150 mbar):

Pressure inlet	Silver contact	Gold plated contact
1/8" NPT	ZA2X18EA0A500000	ZA2X18EG0A500000
1/4" BSPP	ZA2X1QEA0A500000	ZA2X1QEG0A500000
M10 x 1	ZA2X1MEA0A500000	ZA2X1MEG0A500000
Snap in fitting, 2 grooves dia 7.8	ZA2X1TEA0A500000	ZA2X1TEG0A500000
Snap in fitting, 1 groove dia 10	ZA2X1ZEA0A500000	ZA2X1ZEG0A500000
Snap in fitting, 1 spout dia 6 mm	ZA2X1AEA0A500000	ZA2X1AEG0A500000

Other set point values: replace A50 in the product reference by the requested value in mbar

Slow action contact miniature pressure switches, 6.3 x 0.8 mm QC terminals , metal fitting SPNO contact : Type ZA

DIMENSIONS

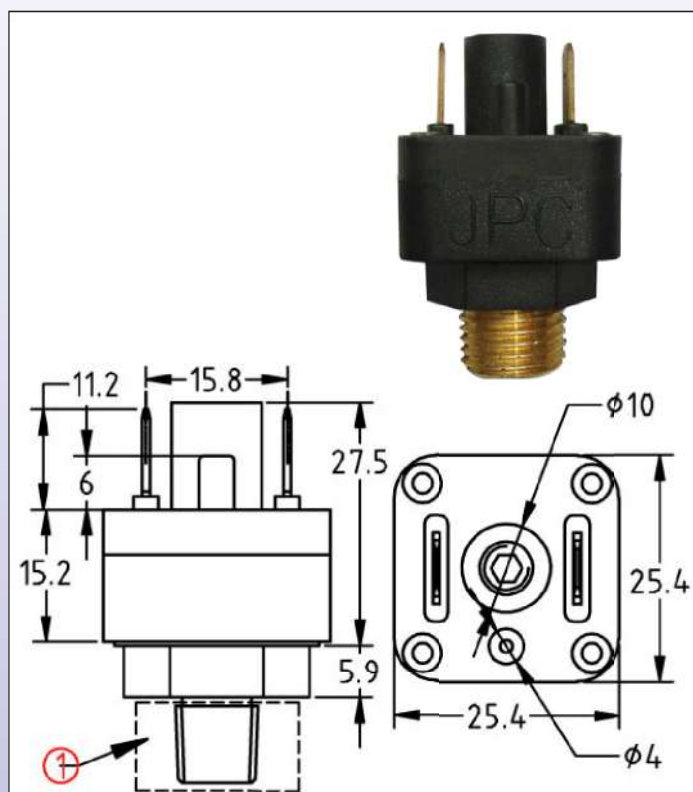

Uses: Low voltage, high sensitivity

Main applications: Electronic printed circuit. This pressure switch is more sensible than snap action models and can be calibrated at lower pressure values. Very small differential.

Membranes: EPDM, dia 22 mm. Silicone or NBR on request

Fluid: water or air

Fitting: Brass (stainless steel on request)

Pressure: positive

Housing: PA66, UL94 V0

Contact: single pole normally open, slow make.

Electrical rating:

- Silver contact: max 1A 250V

- Gold plated contact: max 100 mA, 24V

Action: momentary, close on pressure rise.

Set point calibration: factory calibrated and sealed, not field adjustable


Set point calibration limits: standard calibration 150mbar, other values are achievable from 100 to 1300 mbar

Electrical connection: 6.35 x 0.8 mm quick connect terminals

Maximum pressure: 2 bars (29 PSI)

Ambient temperature limits: 0 to 85°C

Available pressure inlet fittings ①

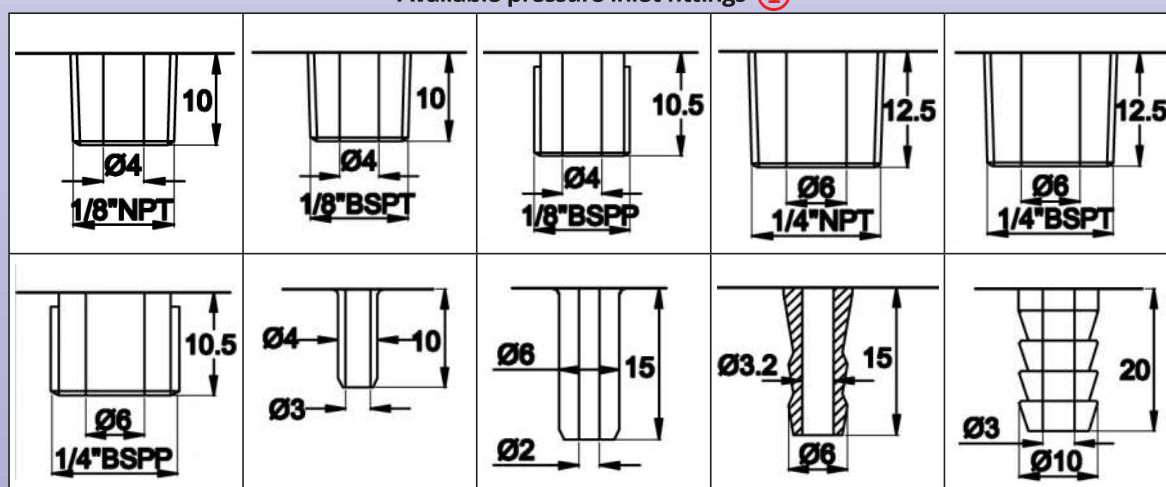


References (with calibration at 150 mbar and brass fitting):

Pressure inlet	Silver contact	Gold plated contact
1/8" NPT	ZA2X2REA0A500000	ZA2X2REG0A500000
1/8" BSPT	ZA2X2PEA0A500000	ZA2X2PEG0A500000
1/8" BSPP	ZA2X2LEA0A500000	ZA2X2LEG0A500000
1/4" NPT	ZA2X2CEA0A500000	ZA2X2CEG0A500000
1/4" BSPT	ZA2X2SEA0A500000	ZA2X2SEG0A500000
1/4" BSPP	ZA2X22EA0A500000	ZA2X22EG0A500000
Smooth spout dia 4 mm	ZA2X23EA0A500000	ZA2X23EG0A500000
Spout dia 6 mm	ZA2X27EA0A500000	ZA2X27EG0A500000
Fluted spout dia 6 mm	ZA2X2JEA0A500000	ZA2X2JEG0A500000
Barbed spout dia 10 mm	ZA2X29EA0A500000	ZA2X29EG0A500000

Other set point values: replace A50 in the product reference by the requested value in mbar

Slow action contact miniature pressure switches, 6.3 x 0.8 mm QC terminals , metal fitting SPNC contact : Type ZA

DIMENSIONS

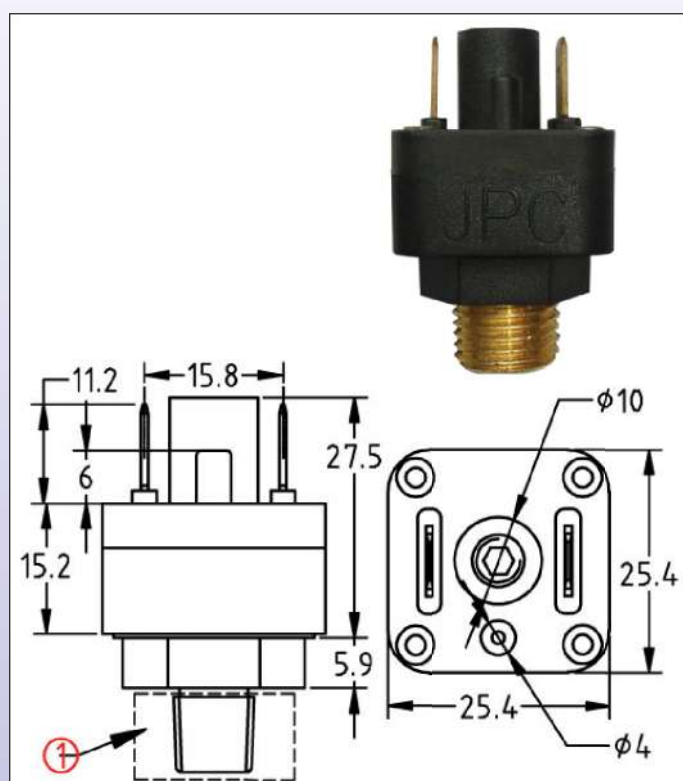

Uses: Low voltage, high sensitivity

Main applications: Electronic printed circuit. This pressure switch is more sensible than snap action models and can be calibrated at lower pressure values. Very small differential.

Membranes: EPDM, dia 22 mm. Silicone or NBR on request

Fluid: water or air

Fitting: Brass (stainless steel on request)

Pressure: positive

Housing: PA66, UL94 VO

Contact: single pole normally close, slow break.

Electrical rating:

- Silver contact: max 1A 250V

- Gold plated contact: max 100 mA, 24V

Action: momentary, open on pressure rise.

Set point calibration: factory calibrated and sealed, not field adjustable


Set point calibration limits: standard calibration 150mbar, other values are achievable from 100 to 1300 mbar

Electrical connection: 6.35 x 0.8 mm quick connect terminals

Maximum pressure: 2 bars (29 PSI)

Ambient temperature limits: 0 to 85°C

Available pressure inlet fittings ①

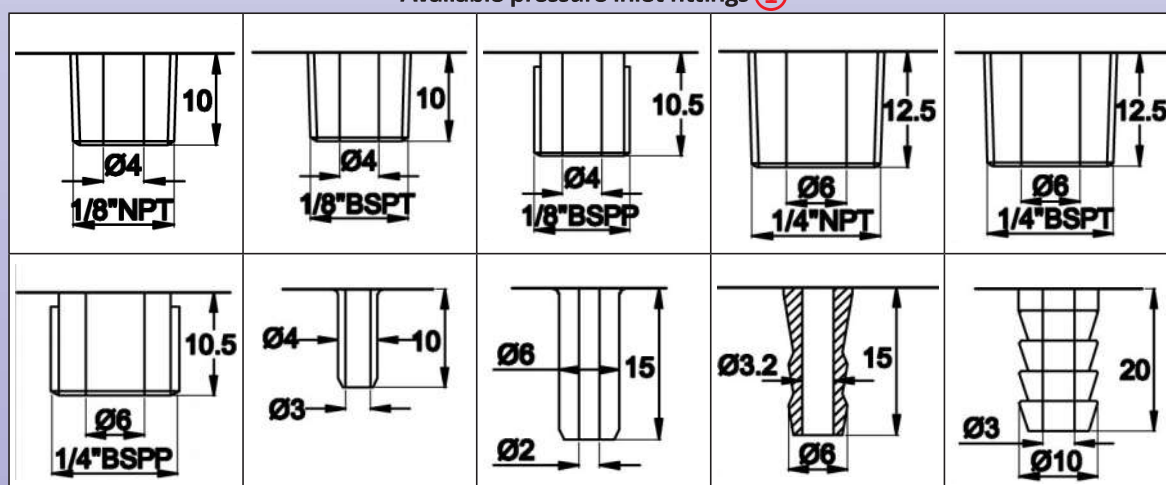

References (with calibration at 150 mbar and brass fitting):

Pressure inlet	Silver contact	Gold plated contact
1/8" NPT	ZA2X1REA0A500000	ZA2X1REG0A500000
1/8" BSPT	ZA2X1PEA0A500000	ZA2X1PEG0A500000
1/8" BSPP	ZA2X1LEA0A500000	ZA2X1LEG0A500000
1/4" NPT	ZA2X1CEA0A500000	ZA2X1CEG0A500000
1/4" BSPT	ZA2X1SEA0A500000	ZA2X1SEG0A500000
1/4" BSPP	ZA2X12EA0A500000	ZA2X12EG0A500000
Smooth spout dia 4 mm	ZA2X13EA0A500000	ZA2X13EG0A500000
Spout dia 6 mm	ZA2X17EA0A500000	ZA2X17EG0A500000
Fluted spout dia 6 mm	ZA2X1JEA0A500000	ZA2X1JEG0A500000
Barbed spout dia 10 mm	ZA2X19EA0A500000	ZA2X19EG0A500000

Other set point values: replace A50 in the product reference by the requested value in mbar