


Steatite connection blocks 450V range



Protected against accidental electric contact,
brass terminals, nickel plated steel screws.

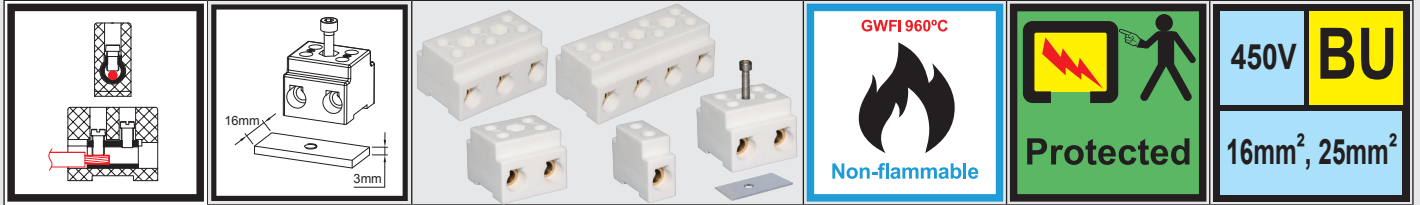

16mm²

Mounting on 16x3mm rail is possible

BU161 	27 gr.	SOLID CONDUCTOR 16mm ² / 10mm ² / 6mm ² AWG6 / AWG8 / AWG10 STRANDED CONDUCTOR 10mm ² / 6mm ² AWG8 / AWG10	BU162 58 gr.
BU163 	81 gr. 1.2 N.m M4 450V 79A Permanent 230°C / 450°F Peak 450°C / 840°F	BU164 103 gr. 	

25mm²

Mounting on 16x3mm rail is possible

BU251 45 gr. 	SOLID CONDUCTOR 25mm ² / 16mm ² / 10mm ² AWG4 / AWG6 / AWG8 STRANDED CONDUCTOR 16mm ² / 10mm ² AWG6 / AWG8	BU252 85 gr.
BU253 132 gr. 	132 gr. 2 N.m M5 450V 101A Permanent 230°C / 450°F Peak 450°C / 840°F	BU254 180 gr.



Page (.pdf)



Drawing 2D (.dwg)



Drawing 3D (.stp)